


Eksempel på opsætning af FTP forbindelse i FTPadmin/400

Som det kan ses af eksemplet blev det hele sat op på under en halv time incl. test.

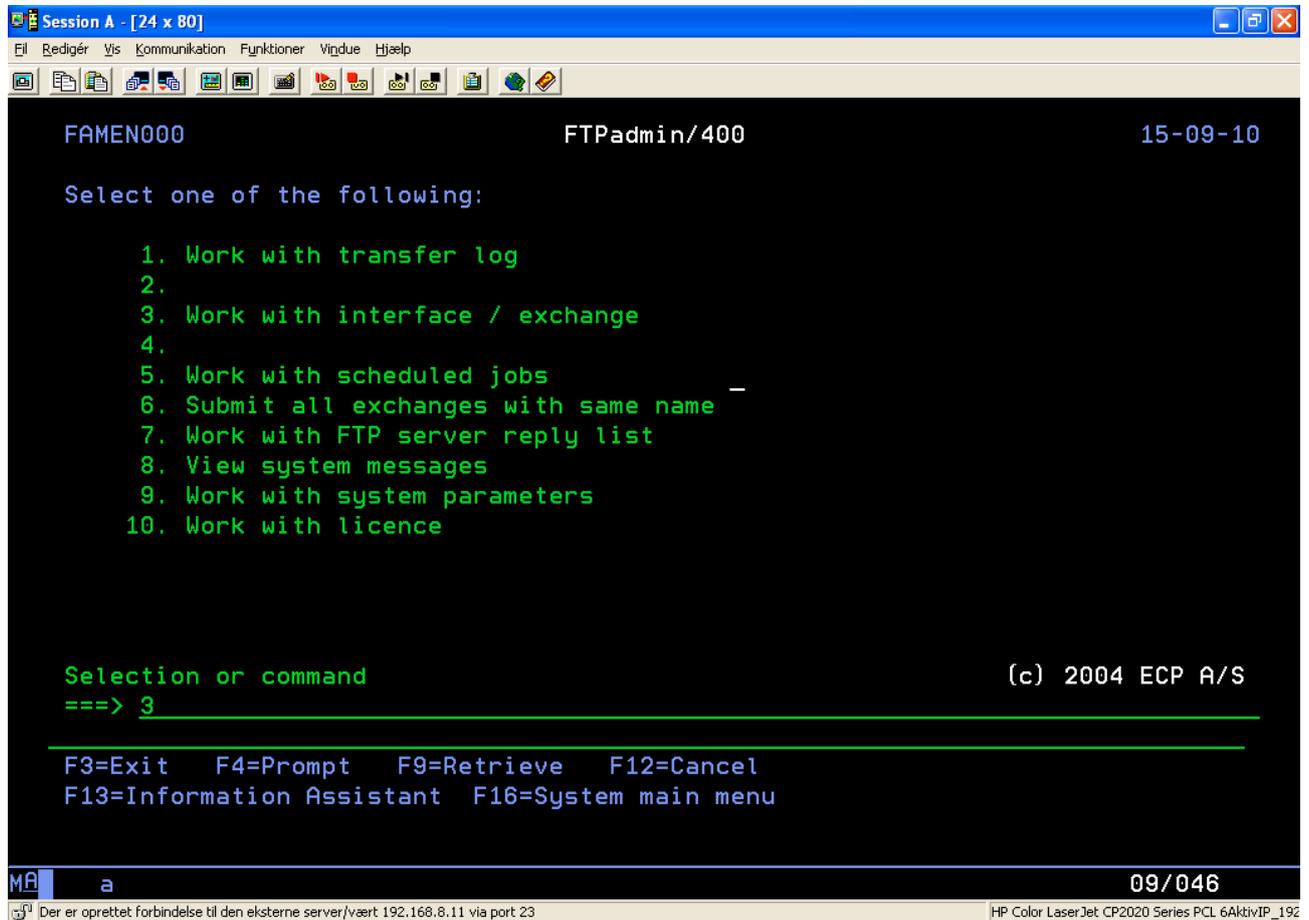

```
Session A - [24 x 80]
FAMEN000          FTPadmin/400          15-09-10


Select one of the following:

  1. Work with transfer log
  2.
  3. Work with interface / exchange
  4.
  5. Work with scheduled jobs
  6. Submit all exchanges with same name
  7. Work with FTP server reply list
  8. View system messages
  9. Work with system parameters
 10. Work with licence

Selection or command          (c) 2004 ECP A/S
==> 3

F3=Exit   F4=Prompt   F9=Retrieve   F12=Cancel
F13=Information Assistant   F16=System main menu

MA a          09/046
Der er oprettet forbindelse til den eksterne server/vært: 192.168.8.11 via port 23   HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

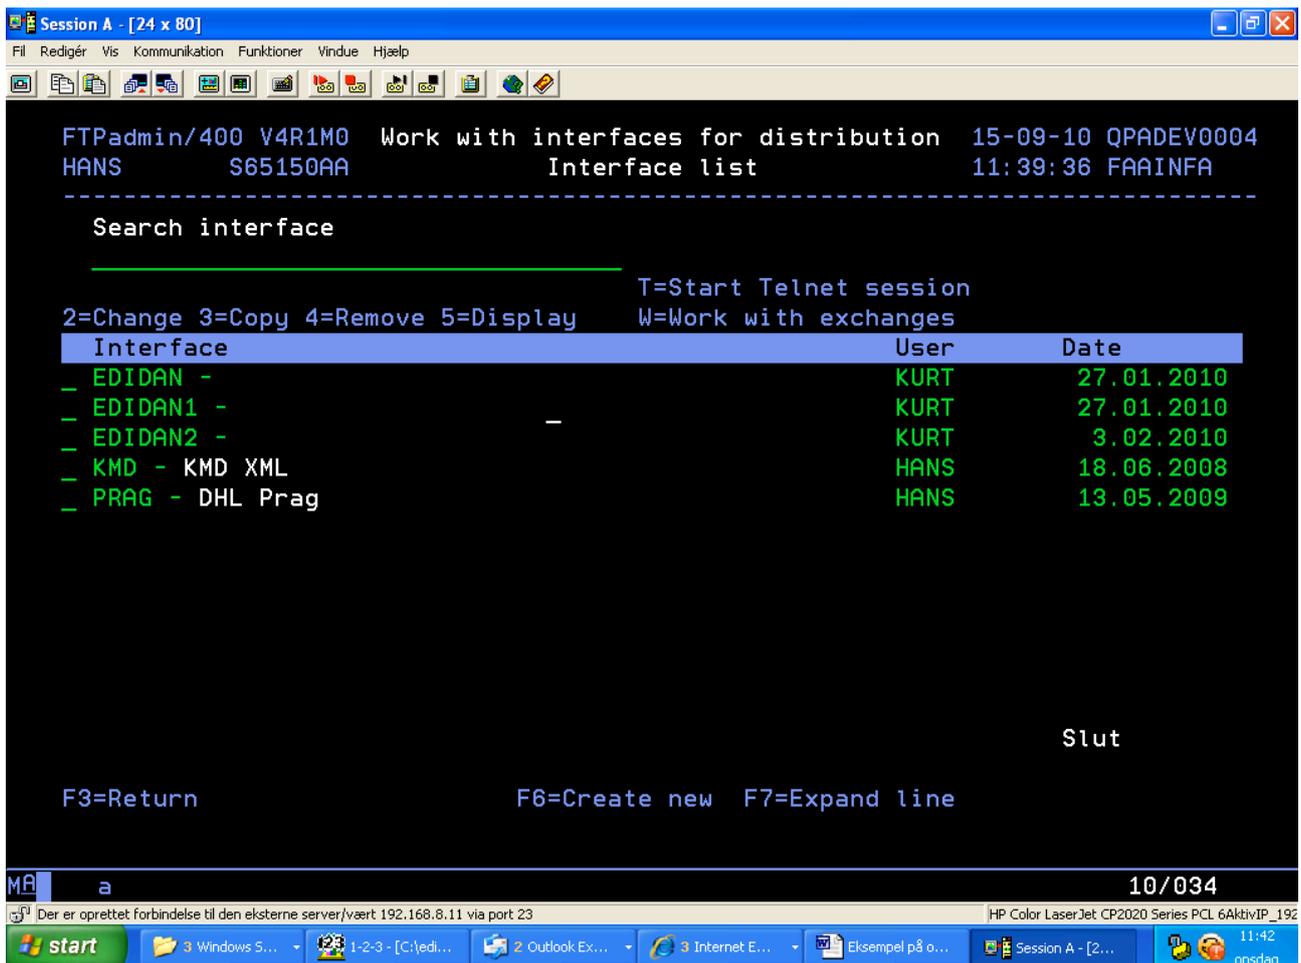

F6 – create nyt interface

```
Session A - [24 x 80]
Fil Redigér Vjs Kommunikation Funktioner Vindue Hjælp
FTPadmin/400 V4R1M0          Modify interface data          15-09-10 QPADEV0004
HANS          S65150AA      DHL Prag          11:42:05 FAAINFA
-----
Interface EDIDANSE
Description EDIDan Sverige
Remote system _____


Internet adress 192.168.8.10   Address verified OK
FTP port _____ (*DFT, TCP/IP port or *SECURE)
Secure connection _____ (*DFT, *NONE, *SSL, *IMPLICIT)
Data protection _____ (*DFT, *CLEAR, *PRIVATE)
FTP server type _____ 1 Default FTP server          F4

Check adress (ping) *YES (*YES/*NO) Wait for 1 (0-600 sec)
Code character id *DFT (CCSID, *DFT)
Jobqueue for batch *DFTJOBQ *LIBL (queue & library)
Interface counter _____ counter length _ Interface status _ (I=Inactive)

Directory scan start byte 13 (Default 13) Changed by KURT          13.05.2009
F7=Additional parameters F10=Test connection(PING)
ENTER=Update F4=Search F8=Start telnet          F12=Return

MA a 08/032
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 | HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

Her kan udfyldes Remote system eller IP adresse.

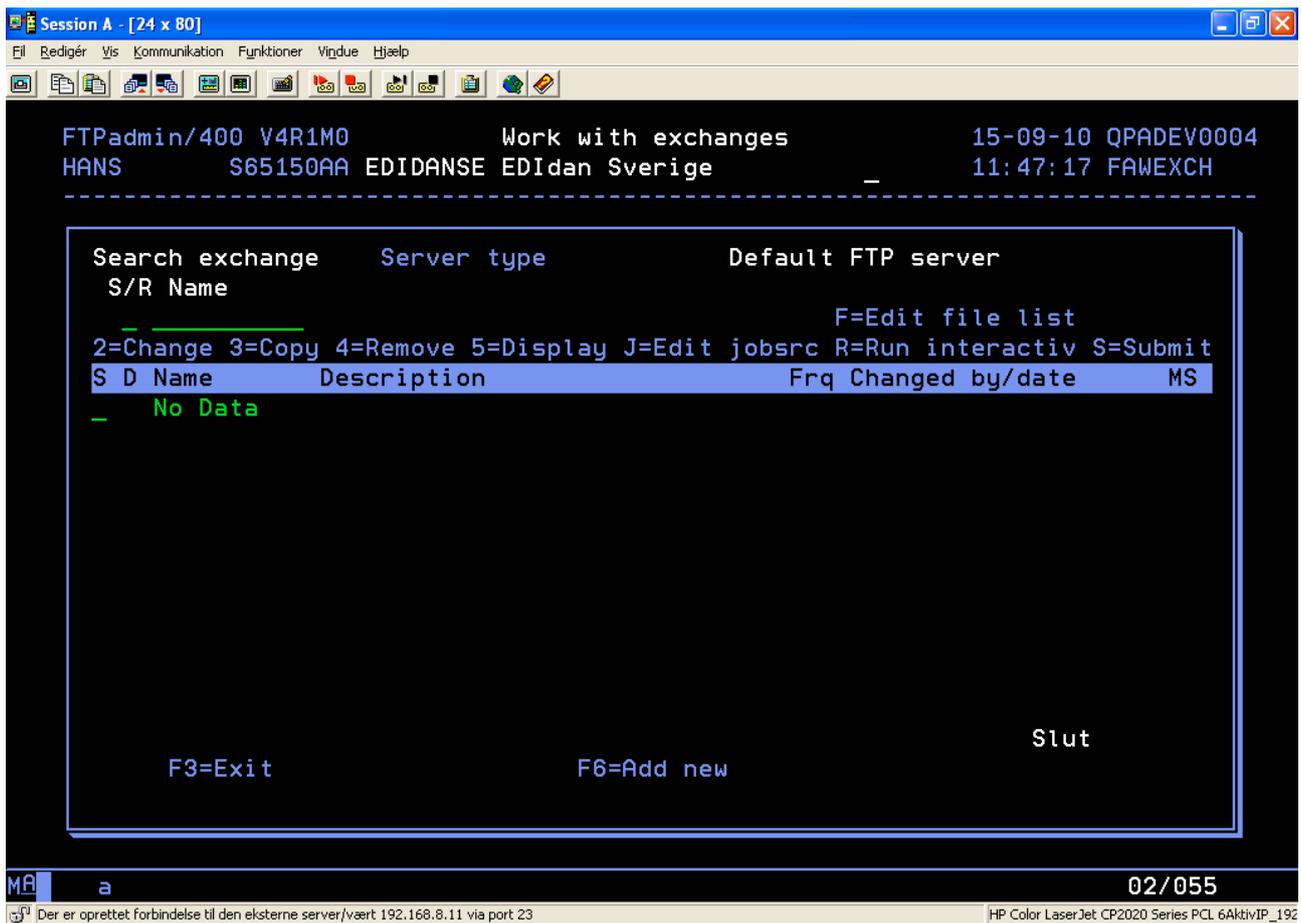

F6 – create ny exchange. Der kan laves lige så mange exchanges under det samme interface som man ønsker. F.eks. send ordrer og modtag ordrebekræftelse og faktura

```

Session A - [24 x 80]
Fil Redigér Vis Kommunikation Funktioner Vindue Hjælp
Exchange ORDERS Direction S S/R Description Send ordrer til EDIdan SE
Days to keep in log 30 (0-999) Log empty sessions Y (Y/N)
Data logging option 1 (1=Save a copy of data files)
Password change N (Y/N) Frequency Edit job script N (Y/N)
User/pwd seedidan Next

Send message to      Userid      Adresse      Type      Severity
User 1 _____  _____  M (B-Break,
User 2 _____  _____  M D-Distr,
User 3 _____  _____  M M-Program,
User 4 _____  _____  M N-Net)

Mail option E
Mail address hans.doering@edidan.net
User pgm (lib/pg1/pg2 _____ / _____ (pgm1) _____ (pgm2)
User pre pgm _____ (pre1)
Exchange file counter *XCN _____ use _ digits
Exchange status code _ (I=Inactive)
Last changed by Last normal run
F3=Exit F9=Maintain job script
F7=FTP command parameters F10=Update ENTER=Next screen

MA a 13/043
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23
HP Color LaserJet CP2020 Series PCL 6AktivIP_192

```

Der sendes mail ved kommunikations fejl. Der er mulighed for at bruge user exit programmer

```
Session A - [24 x 80]
Fil Redigér Vis Kommunikation Funktioner Vindue Hjælp
Exchange ORDERS Direction S S/R Description Send ordrer til EDIdan SE
-----
FTPadmin/400 V4R1M0 Work with exchanges 15-09-10 QPADEV0004
HANS S65150AA EDIDANSE EDIdan Sverige 11:47:17 FAWEXCH
-----
Send data information
File to send *IFS (Name,*DLO,*IFS,*SAVF,*FILE)
Member _____ *ALL,*FIRST or *Generic name
Library _____
File not found severity code 99 0-99
Empty file action C (A=Abort,C=Continue)
Empty file severity code 0 0-99
File option on LOCAL server 0 (0-Leave,1-Clear,2-Delete,3-Move)
Transfer mode _ (A=ASCII,B=Binary,E=EBCDIC)
Append data to existing files N (Y/N) If file name exists on
receiving server
F3=Exit F9=Maintain job script
F10=Update F12=Return Enter=Next screen
MA a 02/049
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

I denne exchange skal der sendes fra IFS'en. Som det ses er der andre muligheder.

```
Session A - [24 x 80]
Fil Redigér Vis Kommunikation Funktioner Vindue Hjælp
FTPadmin/400 V4R1M0 Work with exchanges 15-09-10 QPADEV0004
HANS S65150AA EDIDANSE EDIdan Sverige 11:47:17 FAWEXCH
-----
Exchange ORDERS Direction S S/R Description Send ordrer til EDIdan SE
-----
Send from file directory
/edidanse/ordrer
Send files starting with m and/or ending with (Case sensitive)
or send file
-----
To file directory (destination on receiving server)
/edidank/ordrer
File name on receiving server ordrer *xch *iso*t06
Temporary directory on receiving server
-----
Temporary filename
-----
F3=Exit F7=Script options F1=Help F9=Job Script F12=Return
-----
MA a 02/049
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

Der sendes alle filer der ligger i /edidanse/ordrer der starter med m.

Fil navn på modtagers maskine opbygges af konstant + lbnr + data + tid (resultatet kan ses længere nede i loggen)

```
Session A - [24 x 80]
Fil Redigér Vjs Kommunikation Funktioner Vindue Hjælp
Exchange ORDERS Direction S S/R Description Send ordrer til EDIdan SE
Days to keep in log 30 (0-999) Log empty sessions Y (Y/N)
Data logging option 1 (1=Save a copy of data files)
Password change N (Y/N) Frequency Edit job script N (Y/N)
User/pwd seedidan Next

Create job sceduler entry

Name in jobscheduler FA + S + ED + XX + 011 Synchronise job Y (Y/N)
Start / stop time 090000 --> 180000 with frequency 5 (minutes)

Ma
Ma

F12=Return

F3=Exit F9=Maintain job script F6=Create jobscheduler entry
F7=FTP command parameters F10=Update ENTER=Next screen

Ma a 02/055
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

Jobbet skal hver dag kl. 9:00 og slutte kl. 18:00 og køre hvert 5 minut

```

Session A - [24 x 80]
Fil Redigér Vis Kommunikation Funktioner Vindue Hjælp
-----
FTPadmin/400 V4R1M0          Work with transfer log          15-09-10 QPADEV0004
HANS          S65150AA          View log entries                12:06:21 FAALOGH
-----
Transfer # Interface          D Exchange          Omit empty transfers N (Y/N)
                    R=Run exchange again          Sev
5=Details 9=FTP messages L=Log J=Job script F=File log S=Session log
0 Transfer          Direction          Session start          #files          End
p number          Interface name          Exchange          Date          Time          Ok          Err          sev
- T000020597 EDIDANSE          S ORDERS          15.09.2010 12:06          1          0 00
- T000020596 EDIDANSE          S ORDERS          15.09.2010 12:05          0          0 10
- T000020595 EDIDAN          S ALEX          15.09.2010 12:05          0          0 10
- T000020594 EDIDANSE          S ORDERS          15.09.2010 12:04          0          0 10
- T000020593 EDIDAN          S ALEX          15.09.2010 12:00          0          0 10
- T000020592 EDIDANSE          S ORDERS          15.09.2010 11:58          0          0 10
- T000020591 EDIDAN          S ALEX          15.09.2010 11:55          0          0 10
- T000020590 EDIDAN          S ALEX          15.09.2010 11:50          0          0 10
- T000020589 EDIDAN          S ALEX          15.09.2010 11:45          0          0 10
- T000020588 EDIDAN          S ALEX          15.09.2010 11:40          0          0 10
- T000020587 EDIDAN          S ALEX          15.09.2010 11:35          0          0 10
- T000020586 EDIDAN          S ALEX          15.09.2010 11:30          0          0 10
Mere...

F3=Return          F5=Refresh
-----
MA a A 07/031
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 HP Color LaserJet CP2020 Series PCL 6AktivIP_192

```

Her ses loggen. Som det kan ses er der mulighed for at selectere. F.eks. alle sende exchange til Alex med severity 99.

```
Session A - [24 x 80]
Fil Redigér Vis Kommunikation Funktioner Vindue Hjælp
FTPadmin/400 V4R1M0 Display log file 15-09-10 QPADEV0004
HANS S65150AA FTP log data for transfer T000020597 12:06:56 FAVQLOG
.....1.....2.....3.....4.....5.....6.....7.....
> Sendpasv 0
SENDPASV is off.
Enter an FTP subcommand.
> Namefmt 1
250 Now using naming format "1".
Server NAMEFMT is 1.
Client NAMEFMT is 1.
Enter an FTP subcommand.
> lcd /edidanse/ordrer
Local working directory is /edidanse/ordrer
Enter an FTP subcommand.
> cd /edidandk/ordrer
250 "/edidandk/ordrer" is current directory.
Enter an FTP subcommand.
> put MAP01 ordrer_02_20100915120611
200 PORT subcommand request successful.

Mere...

F7=More data F12=Return

MA a A 01/001
Der er oprettet forbindelse til den eksterne server/vært 192.168.8.11 via port 23 HP Color LaserJet CP2020 Series PCL 6AktivIP_192
```

Udsnit af loggen. Man kan her se hvad fil navnet bliver på modtagers maskine